

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 187 346 A2**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
13.03.2002 Bulletin 2002/11

(51) Int Cl.7: **H04B 1/16**

(21) Application number: **01203160.5**

(22) Date of filing: **21.08.2001**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(30) Priority: **23.08.2000 US 227416**

(71) Applicant: **Siemens Automotive Corporation**  
**Auburn Hills, Michigan 48326-2980 (US)**


(72) Inventors:  
• **Tejas, Desai B.**  
**Sterling Heights, Michigan 48314 (US)**  
• **Thomas, Michael**  
**Crand Blanc, Michigan 48439 (US)**

(74) Representative: **Allen, Derek et al**  
**Siemens Shared Services Limited,**  
**Intellectual Property Department,**  
**Siemens House,**  
**Oldbury**  
**Bracknell, Berkshire RG12 8FZ (GB)**

**(54) Remote signalling receiver with at least two modes of demodulation**

(57) A remote signaling receiver system includes a receiver that operates in two different modes of demodulation to accommodate different types of signals from different types of transmitting devices. A first demodulator, preferably an ASK demodulator, is adapted to process signals from a signal transmitter that generates a first type of signal. A second demodulator, preferably one that is not sensitive to amplitude modulation such

as a FSK demodulator, is adapted to process signals received from at least one other type of device, which provides a second type of signal. A system designed according to this invention is particularly useful as a remote keyless entry system for a vehicle where one or more sensors are provided on the vehicle to provide an indication of a chosen condition of one or more of the vehicle components.

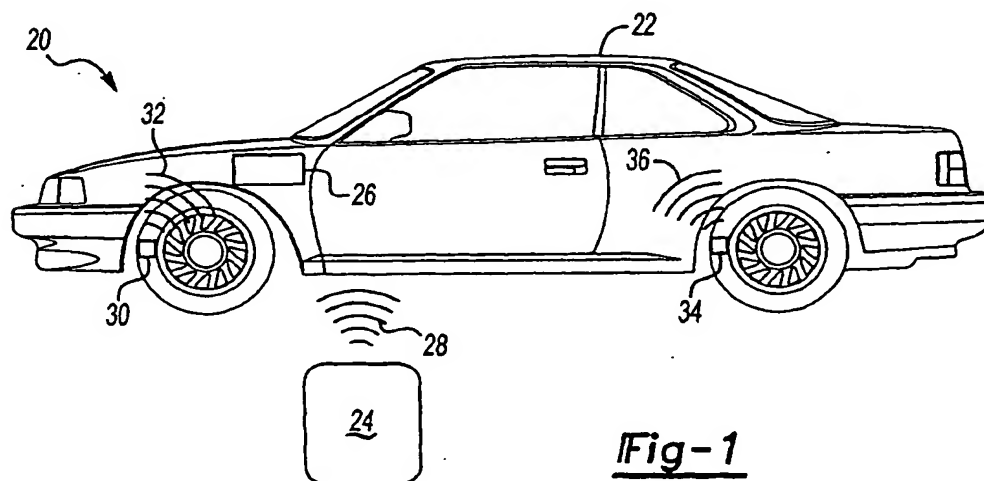

**Fig-1**

**EP 1 187 346 A2**

## Description

### BACKGROUND OF THE INVENTION

[0001] This invention generally relates to signal communication in remote signaling systems. More particularly, this invention relates to handling two types of signals using a receiver that operates, in part, as part of a remote keyless entry system.

[0002] Remote keyless entry systems for vehicles are well known. In typical arrangements a receiver is mounted on the vehicle that receives wireless communication signals from a portable, hand held transmitter used by an owner of the vehicle. Typical transmitters are embodied in a key fob having switches that are activated by the vehicle owner to indicate a desired action on the part of the remote keyless entry system, such as unlocking the doors or the trunk. The receivers typically used in such systems are amplitude shift keying (ASK) receivers. Such receivers are effective for receiving the radio frequency signals typically generated by transmitters in remote keyless entry systems.

[0003] ASK receivers are limited, however, to handling only certain types of signals. More recently, it has become desirable to incorporate multiple functions into fewer or the same number of components. These multiple functions now require receivers in such systems to handle more than one type of remotely generated signal. For example, it has been proposed to incorporate sensors on different components of a vehicle that will generate wireless communication signals indicating a sensed condition of the particular component. Because of the nature of such sensors and surrounding vehicle components, for example, the ASK receivers are not capable of adequately handling such signals so that useful information could be processed.

[0004] ASK receivers typically are programmed to enter a sleep mode except when an expected signal is present. This is accomplished through conventional squelch techniques. Therefore, typical strategies do not permit conventional receiver configurations to recognize various types of signals.

[0005] This invention provides a unique approach to enabling a receiver for a remote keyless entry system to also handle signals generated by one or more sensors placed on the vehicle to indicate a condition of a chosen component.

### SUMMARY OF THE INVENTION

[0006] In general terms, this invention is a remote signaling receiver system having the ability to process more than one type of received signal.

[0007] The invention is particularly useful in a remote keyless entry system for a vehicle that includes a portable transmitter that generates a wireless communication signal. At least one sensor device generates a wireless communication signal indicating a condition sensed

by the sensor. A single receiver includes a first demodulator for processing signals from the portable transmitter. The receiver also has a second demodulator for processing signals from the sensor.

[0008] In one example, the receiver is mounted on the vehicle and the sensor is mounted on a vehicle component. The portable transmitter is a hand held transmitter used by a vehicle owner to gain access to the vehicle, for example. The demodulator in the receiver that processes signals from the portable transmitter is an ASK demodulator. The demodulator within the receiver that processes signals from the sensor mounted on the vehicle is a demodulator that processes signals is not affected by unwanted amplitude modification such as a frequency shift keying (FSK) demodulator or a phase shift keying (PSK) demodulator, for example.

[0009] The various features and advantages of this invention will become apparent to those skilled in the art from the following detailed description of the currently preferred embodiment. The drawings that accompany the detailed description can be briefly described as follows.

### BRIEF DESCRIPTION OF THE DRAWINGS

[0010] Figure 1 schematically illustrates a system designed according to this invention.

[0011] Figure 2 schematically illustrates a receiver designed according to this invention.

[0012] Figure 3 is a flow chart diagram illustrating an example control strategy associated with a system designed according to this invention.

### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0013] A remote keyless entry system 20 allows a vehicle owner to control certain functions on a vehicle 22 by utilizing a portable transmitter 24. A receiver 26 mounted on the vehicle receives wireless communication signals (schematically illustrated at 28) from the portable transmitter 24, which indicates the vehicle owner's intentions. Examples include a signal to unlock the doors or to open the trunk. Such transmitters are known in the art and have more functions than those just mentioned. The radio frequency signals generated by such transmitters are also known.

[0014] The vehicle 22 preferably includes at least one sensor 30 that provides a wireless communication signal (schematically illustrated at 32) that provides an indication of a condition sensed by the sensor. The illustrated example includes another sensor 34 that generates a remote communication signal (schematically illustrated at 36). The illustrated embodiment includes tire pressure sensors that provide an indication of tire pressure. Other sensors useful with other vehicle components are within the scope of this invention.

[0015] The receiver 26 in the illustrated example pref-

erably processes signals from the remote, portable transmitter 24 and from each of the sensors 30, 34 supported on the vehicle. A receiver designed according to this invention may receive signals from other types of signaling devices or signal sources.

[0016] The receiver 26 preferably includes the ability to demodulate signals from different sources using different modes of demodulation.

[0017] As schematically illustrated in Figure 2, the receiver 26 includes an antenna 40 for receiving signals from a plurality of remotely located devices. "Remotely located" as used in this description refers to a location remote from the receiver 26. Such devices may be remote from a vehicle or supported on the vehicle, for example.

[0018] A microprocessor 42 associated with the receiver 26 preferably is programmed to recognize and process the various signals received by the receiver and to then communicate with whatever devices are necessary to achieve the results desired based upon the communication received. For example, when a signal is received from the transmitter 24 indicating a vehicle owner's intention to unlock the doors, the microprocessor 42 preferably is programmed to interpret such a signal and then to cause the door lock controller to unlock the doors. Another example would be to receive a signal from one of the sensors on the vehicle and to have that information stored in an appropriate memory location or to provide a warning signal to a driver regarding a condition of the associated vehicle component.

[0019] The receiver 26 preferably includes a first demodulator 44 that is adapted to process the signals received from the portable transmitter 24. In this example, because the portable transmitter 24 generates wireless communication signals as known in remote keyless entry systems, the demodulator 44 is an ASK demodulator.

[0020] A second demodulator 46 preferably is capable of handling signals unaffected by unwanted amplitude modulation. In one example, the second demodulator 46 is a FSK demodulator that is adapted to process signals from the one or more sensors 30, 34 associated with the chosen vehicle components. Therefore, the receiver 26 is capable of receiving and processing two different types of communication signals from different types of devices.

[0021] There are a variety of strategies for utilizing the two demodulators of the receiver that are within the scope of this invention. One example strategy is to have the ASK demodulator 44 receive all signals that are gathered by the antenna 40. Whenever the signal is appropriately demodulated by the demodulator 44, the output is then processed by the microprocessor 42 in a manner that provides the intended results. In the event that the received signal cannot be demodulated by the ASK demodulator 44 (i.e., the output cannot be interpreted by the microprocessor 42), the signal is then demodulated using the FSK demodulator 46. In the event that the signal is a valid signal from an appropriate de-

vice, the results are then processed by the microprocessor 42 as needed for a particular situation.

[0022] This example operation strategy is illustrated in Figure 3 in flow chart 50. This particular strategy takes advantage of the fact that an ASK receiver will not provide a valid output when receiving FSK-based signals. Whenever the output from the demodulator 44 is not interpretable by the microprocessor 42, the demodulator 46 then is used to demodulate the signal.

[0023] In one example, signals from the portable transmitter 24 include a 2K baud rate while the signals generated by the sensors 30, 34 include a 9.6 K baud rate. The different baud rates provide an ability for the microprocessor portion 42 to decipher between the different types of signals as demodulated using the demodulators 44 or 46.

[0024] Whenever a wanted signal is received by the receiver 26, it preferably is sliced or translated to TTL levels. The preferred slice level is between one-half and two-thirds of the peak-to-peak voltage of the received signal. The data slicer preferably is arranged to slice the data using the average of the baseband output of the receiver as a reference level. The reference level preferably is shifted to squelch the output if the peak voltage of the baseband output is higher than the level for the signal plus appropriate tolerances.

[0025] When ASK data is present, the output represents the signal sliced to TTL levels. When FSK data is present, the output is squelched high or low during the presence of an FSK signal or a sufficiently large period of time to represent a code violation. The receiver would be placed in the ASK demodulation mode and the microprocessor would decode the incoming signal if ASK data is present and would shift to the FSK demodulator if a code violation as stated above is encountered.

[0026] In another example, the receiver normally operates in an FSK mode. When using an FSK demodulator, the maximum amplitude of the desired signal is typically less than the peak-to-peak amplitude of the noise since the output voltage is directly proportional to the frequency deviation from the nominal center frequency of the received signal. This provides a manner of controlling the processing of signals received by the receiver 26, which allows for two different modes of demodulation to be used for handling two different types of signals.

[0027] While the receiver is operating in FSK mode and an FSK signal is received it will be appropriately decoded by the microcontroller. If an ASK signal is received when the receiver is in FSK mode, the output would be squelched during one state and there would be noise during the other state, which can be used as an indication to switch back to an ASK mode. By recognizing the pattern of highs and lows in the received signal, the microcontroller is able to determine when to shift from the default FSK mode to the ASK mode.

[0028] Another example includes having the two demodulators operating simultaneously. The microcontrol-

ler in this example deciphers which mode of demodulation is needed for a received signal and then processes it accordingly. In this example, the received signals are effectively handled using two different channels. The remote keyless entry signal may be received on the normal radio frequency channel while the vehicle component sensor signal is received on the image channel. The microprocessor in this example preferably is programmed to observe the phase of the incoming signal and to cause the appropriate demodulator to be used. In this example, the signal frequencies provide information for distinguishing between the different signals.

[0029] While the examples discussed above focus on using an ASK demodulator and a FSK demodulator, other types of demodulators are useful within the scope of this invention. For example, phase shift keying (PSK) demodulators may be used as the second demodulator 46 when an ASK demodulator is used as the first demodulator 44.

[0030] The preceding description is exemplary rather than limiting in nature. Variations and modifications to the disclosed examples may become apparent to those skilled in the art that do not necessarily depart from the essence of this invention. The scope of legal protection given to this invention can only be determined by studying the following claims.

#### Claims

1. A remote signaling receiver system comprising:
  - a first transmitter device that generates at least a first wireless communication signal;
  - a second transmitter device that generates at least a second wireless communication signal; and
  - a receiver that receives the first and second signals, the receiver including a first demodulator for processing the first signal and a second demodulator for processing the second signal.
2. The system of claim 1, wherein the second device and the receiver are supported on a vehicle and the sensor device signal provides information regarding a condition of a selected vehicle component.
3. The system of claim 2, wherein the sensor device includes a tire condition sensor and the sensor signal provides information regarding at least one condition of at least one of the vehicle tires selected from the group of tire pressure, tire temperature, tire thickness and acceleration.
4. The system of claim 1, wherein the first transmitter device is a portable keyless entry signaling device, the first demodulator is an ASK demodulator and the second demodulator is a demodulator that is not affected by amplitude modulation on the second signal.
5. The system of claim 1, wherein the receiver is programmed to process all received signals using one of the demodulators and only when a received signal output is not discernable from the one demodulator to process the received signal using the other demodulator.
6. The system of claim 1, wherein the transmitter signal has a first baud rate and the sensor signal has a second baud rate that is at least two times higher than the first baud rate.
7. A method of processing signals received by a receiver having a first demodulator that is adapted to demodulate a first type of signal from a first signal source and a second demodulator that is adapted to demodulate a second type of signal from a second source, comprising the steps of:
  - (A) receiving a signal;
  - (B) determining whether the demodulated signal can be interpreted as a signal from the first source or the second source;
  - (C) demodulating the received signal using the first demodulator when the received signal is from the first source; and
  - (D) demodulating the received signal using the second demodulator when the received signal is from the second source.
8. The method of claim 7, wherein step (C) includes using amplitude shift keying and step (D) includes using a demodulation technique that is not sensitive to amplitude modulation in the received signal.
9. A vehicle remote keyless entry system comprising:
  - a portable transmitter that generates a wireless communication signal;
  - at least one sensor device supported relative to a component on the vehicle that senses a condition of the component and generates a wireless communication signal; and
  - a receiver supported on the vehicle that receives the transmitter signal and the sensor signal, the receiver including a first demodulator for processing the transmitter signal and a second demodulator for processing the sensor signal.
10. The system of claim 9, wherein the sensor device includes a tire condition sensor and the sensor signal provides information regarding a condition of at least one of the vehicle tires.

11. The system of claim 9, wherein the first demodulator is an ASK demodulator and the second demodulator is a demodulator that is not sensitive to amplitude modulation.

5

12. The system of claim 11, wherein the second demodulator is a FSK demodulator.

13. The system of claim 9, wherein the receiver is programmed to process all received signals using one of the demodulators and only when a received signal output is not discernable from the one demodulator to process the received signal using the other demodulator.

10

15

14. The system of claim 9, wherein the transmitter signal has a first baud rate and the sensor signal has a second baud rate that is at least two times higher than the first baud rate.

20

15. The system of claim 9, wherein the receiver includes a microprocessor that is programmed to receive the transmitter signal on a first channel and the sensor signal on an image channel.

25

30

35

40

45

50

55

5

